


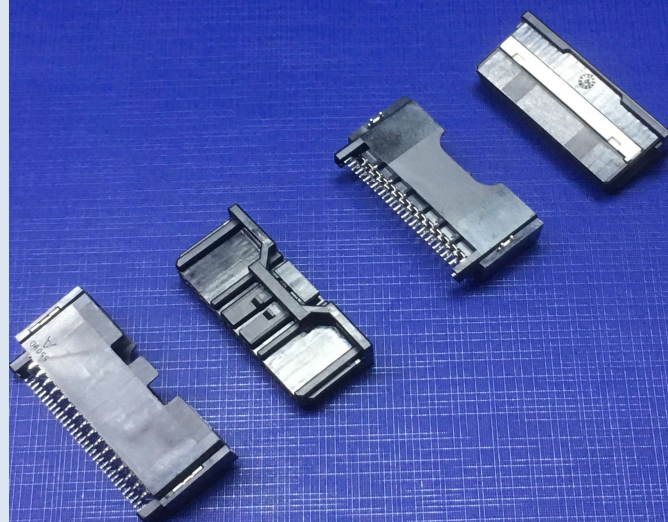
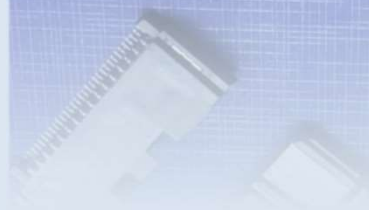


FUOURS



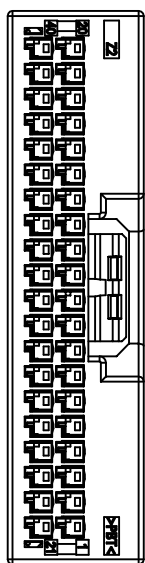


BMS_CCS连接器
FUOURS® 01020 系列

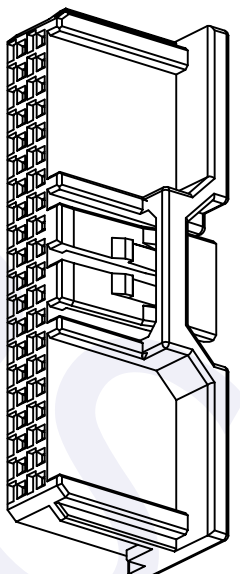

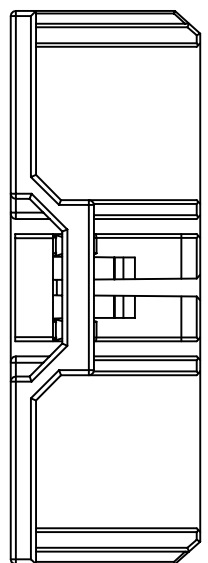


PIN数	品番	A	B	C
24	130655-2-24*	26	27.9	22
28	130655-2-28*	30	31.9	26
32	130655-2-32*	34	35.9	30
36	130655-2-36*	38	39.9	34
40	130655-2-40*	42	43.9	38

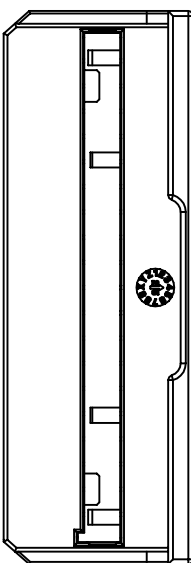

D	
KEY-1	4.30
KEY-2	2.75
KEY-3	1.20

NOTE:
 1. THE RETENTION LATCH LF THE RETAINER MUST BE OUT SIDE OF SOCKET HOUSING WHEN PRE-ASSEMBLY.(RETAINER IS IN PRE-ASSEMBLED CONDITION)
 2. WHEN THE RETAINER IS IN FINAL LOCK CONDITION AT THE SHIPPED TO CUSTOMER,IT MUST BE UNLOCKED TO PRE-ASSEMBLED CONDITION.

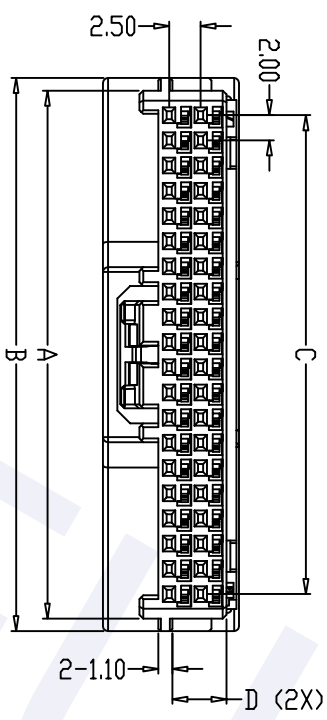

KEY-1 130655-2-**A

FUOURS Technology (Dongguan) Co., Ltd		EXTEND USE		TITLE	
GENERAL TOLERANCE ①		MATERIAL PBT	APPD	DWG NO	01020_130655
DIMENSION	ANGLES	QTY	CHD	P/N	XXXXXX
X ±0.20	X° ±2°				
XX ±0.10	XX' ±1'				
XXX ±0.05	XXX° ±0.5°				
XXXX ±0.03	FINISH		DRN		
	▽▽▽▽▽▽▽▽▽▽				
			2025/03/00	SHEET 1/1	SCALE UNIT mm
				REV A0	

REV	DESCRIPTION	NAME	DATE
A0	NEW RELEASE		25.03.00

● CSS采集/BMS电池管理连接器

01.01020.32200BM-1/-2/-3

本连接器应用于BMS汽车电池管理系统和BEES电池储能系统的CCS采集连接器，8~40PIN不同规格，小型化，低背化，具有高集成信号传输能力，2.0mm端子间距。

额定电流：3A

额定电压：50V交流、直流

温度范围：-40°C至+125°C

绝缘电阻：最小100 mΩ。

耐受电压：1000V AC/分钟



FUOURS Technology (DongGuan) Co., Ltd
TEL:0769-81559566 18929459699 (WeChat)
E-mail: sales@fuours.com
Http://www.fuours.com

